
## Model: EST2



## SLIM TRACK 2-SECTION SOLID BEARING STEEL SLIDE

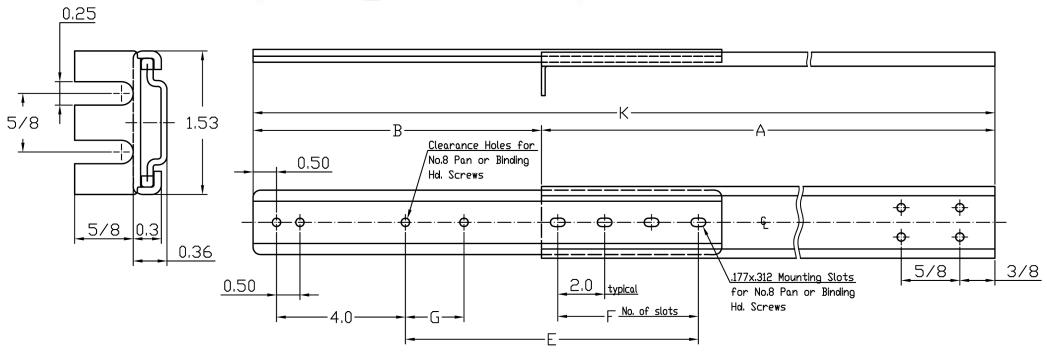

## NOTES:

Solid Bearing, Superior Performance Against High Shock and Vibration.

- 1. LOAD CAPACITY: Up to 100 lbs.
- 2. MATERIAL: Prime hard cold Rolled Steel. All Parts Built to Military Specifications
- LUBRICANT: Built in Permanent Dry Lubricant, Never Needs Oiling. Dry Lubricant, Baked on ot 400° per Mil-L-25504, over Phosphate Coating per Mil-P-16232, Type M.
- BRACKETS: Slides Shipped with Standard 2" Rear Mounting Brackets. If Specified, any one of the Following Size Rear Mounting Brackets will be Shipped with Slides: 4", 6", 8", 10" or 12".
- 5. FINISH: Molybdenum Disulphide.

## SLIDE DIMENSIONS

MDDEL No.	Α	В	E	ᄔ	G	Κ
EST2-10	10	7	4.50	1		17
EST2-12	12	9	6.50	1		21
EST2-14	14	11	8,50	1		25
EST2-16	16	12	10,50	2		28
EST2-18	18	13	12.50	2		31
EST2-20	20	15	14.50	2	2	35
EST2-22	22	16	16.50	3	J	38
EST2-24	24	17	18.50	3	J	41
EST2-26	26	19	20.50	5	Ŋ	45
EST2-28	28	20	22.50	5	S	48
EST2-30	30	22	24.50	5	2	52

Choice of Positive Locking in closed and/or extended position or Stop - Out Only which enables easy entry of Chassis into Cabinet without manipulations of Catches.

When Ordering, please specify Feature needed:

ESBM2-20-SO (stop-out only). ESBM2-20-PL (positive locking). ESBM2-20-FD (fast disconnect).

<sup>\*</sup> Load Ratings are based on a pair of 18" Slides with Standard Extension